# VICTA™
By HSM

## Commercial Cover Options

**(800) 437-4220**
235 2nd Ave NWHickory, NC 28601

**Vinyl Fabrics**

ENDURATEX™ We cover the world.


OMNOVA A Division of SURTECO



VictaCoverOptions_R1


# HAMPTON

HAMPTON | OXEN-SOFT

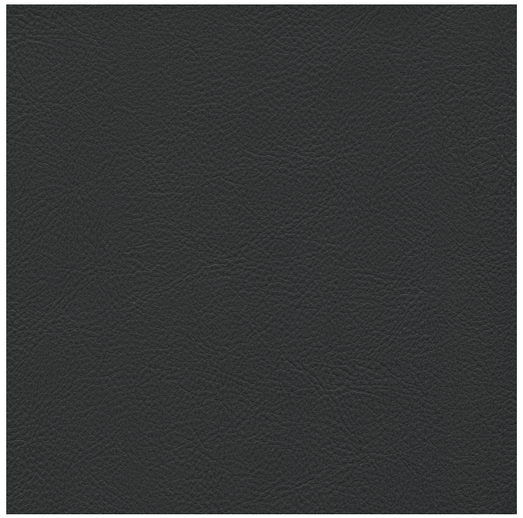


**300010A1I**

HPT-6508 A
EBONY

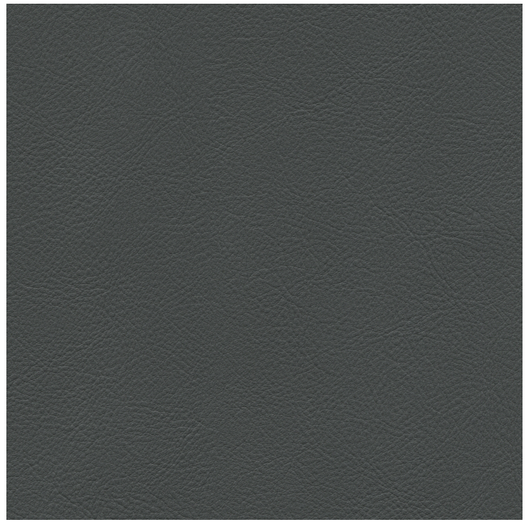


**300230A1I**

HPT-6439 A
GRANITE

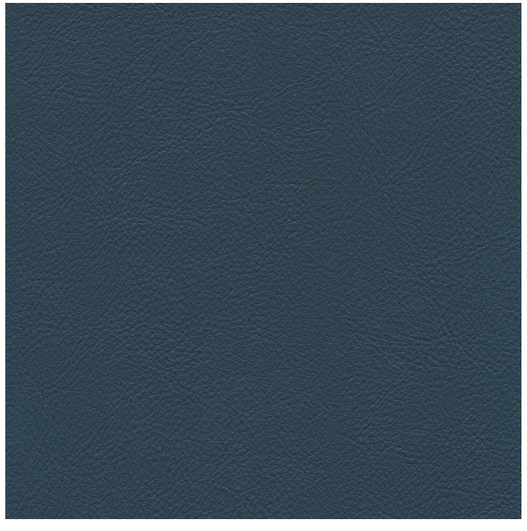

**300020A1I**

HPT-6800 A
LAPIS

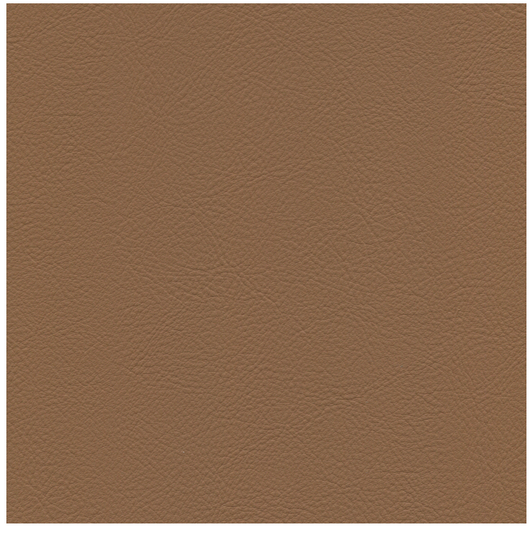

**300120A1I**

HPT-6962 A
SADDLE

HAMPTON with FORBID is manufactured to meet the following typical properties:

## Specifications:

| | |
|---|---|
| Width | 54" |
| Roll Size | 30 yds |
| Thickness | 1.02 mm |
| Nominal Weight PERF | 30 oz. per linear yd |
| Nominal Weight TRIM | 33 oz. per linear yd |
| Contents | 100% PVC |
| Backing | Q1 Polyester |
| Cold Crack | -10°F |
| UV Stabilized Pigments | 650 hours minimum |
| Abrasion Resistance | Wyzenbeek: (100K cycles #10 cotton duck) |

## Meets Flammability Requirements*:

Motor Vehicle Safety Standard 302
California Technical Bulletin 117-2013 Section 1**
BIFMA, Class A
UFAC, Class 1
NFPA 260, Class 1

*This term and any corresponding data refer to typical performance in the specific test indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.
** This product, when tested with suitable component materials, may comply with California Technical Bulletin 117-2013, Section 1.

## Suggested Applications:

Automotive, RV, Office, Residential, General Seating

This fabric meets or exceeds these ACT performance guidelines. Certification Marks owned by ACT.

## FORBID™ Clean and Care Guide

FORBID dramatically increases stain resistance while preserving the integrity of the fabric luster and softness.

**Method One:**
For most common stains, use mild soap and water.

**Method Two:**
If Method One doesn't work, use the following household items; FANTASTIK, 409 or MR.CLEAN.

**Method Three:**
For tougher stains such as permanent marker, paint and lipstick, use 70% isopropyl alcohol.

| | STAINING AGENT | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | DIRT | PEN MARKS | SHARPIE | PAINT | KETCHUP & MUSTARD | LIPSTICK | NAIL POLISH | BLUE JEAN |
| METHOD 1 | X | X | | | | | | X |
| METHOD 2 | X | X | | | X | X | | X |
| METHOD 3 | | X | X | X | X | X | X | X |

The Enduratex™ care guide addresses the performance of FORBID™ products as indicated in product testing, conducted under laboratory conditions. Results may vary. The information contained in this guide is not a guarantee and does not relieve the user of the responsibility of proper and safe use of recommended cleaning agents. The use of certain agents has been found to be harmful to the surface appearance and lifespan of vinyl. Please familiarize yourself with those products for best results. Enduratex™ topcoat, FORBID™, is resistant to most common stains, however existing dyes and pigments in some agents have been seen to create a permanent stain if not properly treated in a timely manner. Enduratex™ maintains the highest vinyl production standards. Anomalies may occur during finishing if the vinyl comes into contact with incompatible forms.

ENDURATEX™ and FORBID are trademarks of CGPC America Corp.
and may not be used without written permission of CGPC America Corp.

CFFA CHEMICAL FABRICS & FILM ASSOCIATION INC. | act | INTERNATIONAL CERT | IIDA INTERNATIONAL INTERIOR DESIGN ASSOCIATION INDUSTRY MEMBER | NEWH | AMERICAN SOCIETY OF INTERIOR DESIGNERS INDUSTRY PARTNER

VICTA™ By HSM | ENDURATEX™

# OXEN SOFT

HAMPTON

OXEN-SOFT



**30007090W**
OXS-4564
GREEN



**3001B090W**
OXS-5205
CAMEL



**30003090W**
OXS-4567
DARK BROWN

**OXEN** with FORBID®
is manufactured to meet the following typical properties:

| | |
|---|---|
| Width | 54" |
| Roll Size | 30 yds. |
| Nominal Weight | 32 oz. per lin. yd. |
| Contents | 100% Virgin Vinyl |
| Cold Crack | -10° F |
| UV Stabilized Pigments | 300 hours minimum |
| Abrasion Resistance | Heavy Duty Wyzenbeek |
| Class Rating | ASTM D-3690 Class A |
| Thickness | 1.02 mm |

*Compatible with commercially available adhesives.*

**Suggested Applications:** RV / Automotive / Office / General Seating / Residential Seating

**Meets flammability requirements*:**
Motor Vehicle Safety Standard 302
California Technical Bulletin 117-2013, Section 1
BIFMA Class A
UFAC Class 1

*This term and any corresponding data refer to typical performance in the specific test indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

FORBID® dramatically increases the stain resistance, while preserving the integrity of the fabric luster and softness.

FORBID® Cleaning instructions:

| CLEANING METHOD | STAINING AGENT | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | DIRT | FOOD SPILLS | BEVERAGE | PAINT | KETCHUP & MUSTARD | LIPSTICK | INK PEN | BLOOD, URINE |
| METHOD 1 | X | X | | | | | | X |
| METHOD 2 | X | X | | | X | X | | X |
| METHOD 3 | | X | X | X | X | X | X | X |

Method One: For most common stains and spills, use mild soap and water.

Method Two: If Method One doesn't work, use the following household items - FANTASTIK • 409 • MR. CLEAN.

Method Three: For tougher stains such as sharpie, paint and lipstick, use a 70% isopropyl alcohol wipe.

For more information, please visit **www.forbidsrt.com**

The Enduratex™ care guide addresses the performance of FORBID products as indicated in product testing, conducted under laboratory conditions. Results may vary under actual conditions.

The information contained in the care guide is *not* a guarantee and does not relieve the user of the responsibility of proper and safe use of the product and the use of recommended cleaning agents. The use of certain agents has been found to be harmful to the surface appearance and lifespan of vinyl, please familiarize yourself with those substances for best results.

Enduratex™ topcoat, FORBID, is resistant to most common stains; however, existing dyes and pigments in some staining agents have been seen to create a permanent stain if not properly treated in a timely manner.


Enduratex™ maintains the highest vinyl production standards. Anomalies may occur during finishing if the vinyl comes into contact with incompatible forms.

ENDURATEX™ and FORBID® are trademarks of CGPC America Corp.
and may not be used without written permission of CGPC America Corp.


CFFA CHEMICAL FABRICS & FILM ASSOCIATION INC. act INTERNATIONAL CERT IIDA INTERNATIONAL INTERIOR DESIGN ASSOCIATION INDUSTRY MEMBER NEWH AMERICAN SOCIETY OF INTERIOR DESIGNERS INDUSTRY PARTNER

VICTA™ By HSM | ENDURATEX™


# LUXURY MINI-PERF

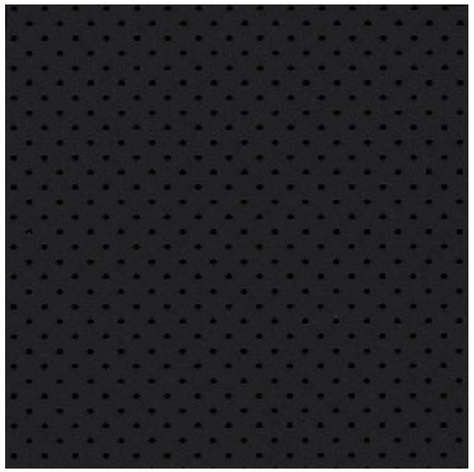


**30061AA1D**
543749
CHARCOAL

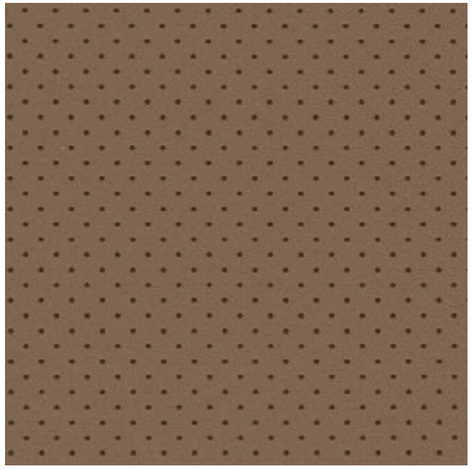

**30012AA1D**
543748
CORK

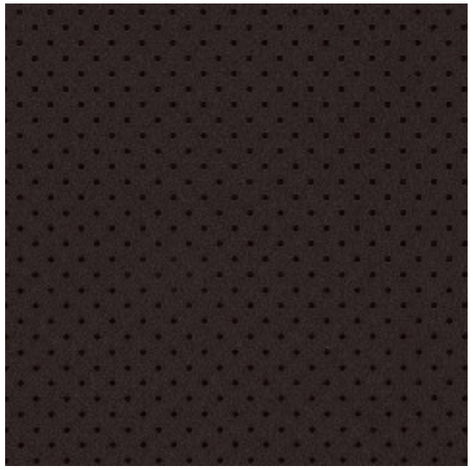

**3000HAA1D**
543751
MAHOGANY

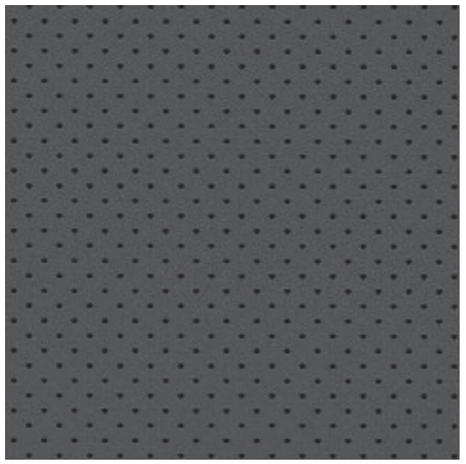

**30045AA1D**
543782
MED SLATE

## Physical Specifications

| | |
|---|---|
| Weight (CFFA-700d) | 30 oz/lin yd [20 oz/yd²] |
| Weight, Metric (CFFA-700d) | 930 g/lin m [680 g/m²] |
| Width (CFFA-700a) | 54 in. [137 cm] |
| Face Composition | PVC |
| Backing Description | Polyester Terry Loop Knit |
| Roll Size | 30 lin yd [27 lin m] |
| Emboss Level | Light |
| Shipping Weight/ Roll | 60 lb [27 kg] |

## Performance Features

| | |
|---|---|
| Protective Finish | Clear Vinyl |
| Use | Indoor/Outdoor |
| QUV hours (minimum) | 650 |
| Adhesion #/in., min (CFFA-3) | 4 Warp, 4 Fill |
| Tensile Strength #, min (CFFA-17) | 85 Warp, 75 Fill |
| Tack Strength #, min (CFFA-14) | 35 Warp, 30 Fill |
| Trap Tear Strength #, min (CFFA-16c) | 20 Warp, 27 Fill |
| Wyzenbeek Abrasion (CFFA-1a) | 6,000 Wirescreen (double rubs) |
| Blocking (CFFA-4 No. 1) | Pass |
| W-Flex - 25,000 cycles (CFFA-10) | Pass |
| Crocking Resistance - 20 cycles no stain (CFFA-7) | Pass |
| Fungal Resistance (ASTM-G-21) | Pass |
| Cold Crack (CFFA-6a) | -20 °F [-29 °C] |
| Fogging (SAE J1756) | Yes |

VICTA™ By HSM | OMNOVA A Division of SURTECO