



Commercial Cover Options

(800) 437-4220

235 2nd Ave NW Hickory, NC 28601


Vinyl Fabrics

SPRADLING®






300140DIE
APX-2554
BRILLIANT WHITE

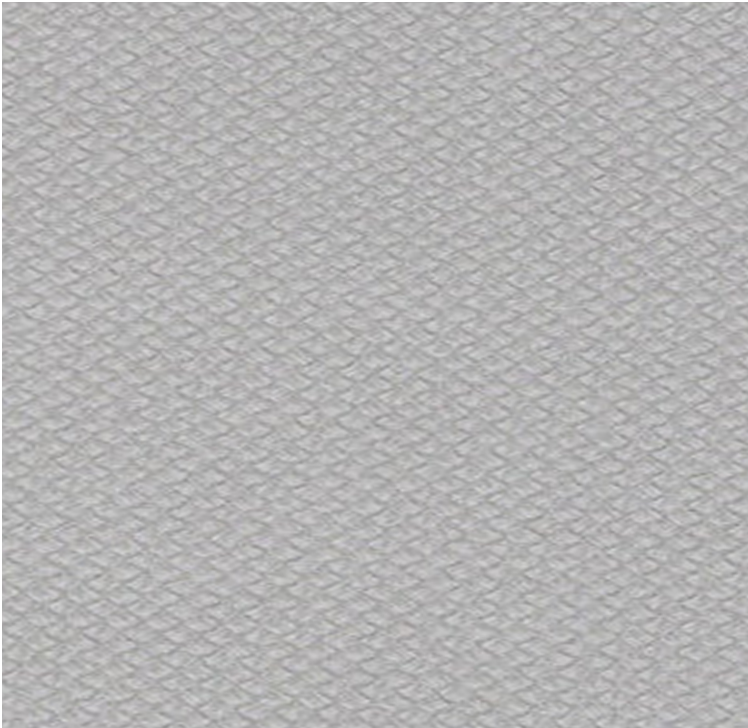

300260DIE
APX-2551
STEEL SILVER

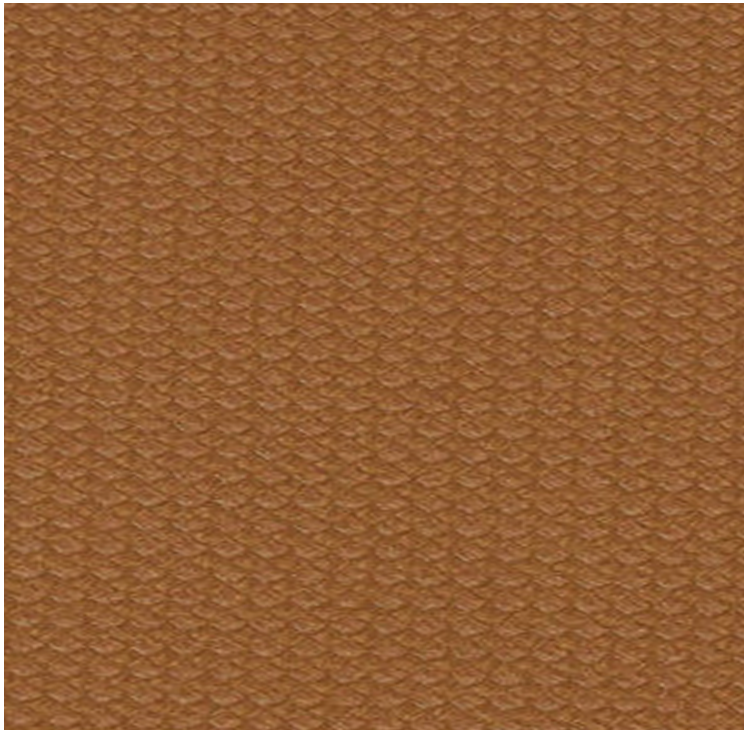

3001E0DIE
APX-2550
CHERRY WOOD

CHARACTERISTICS

Content	Vinyl
Backing	Hi-Loft™ 100% Polyester

Specifics

Weight:	29 oz.
Width:	54 in.
Roll Size:	30 yd.

Flame Retardancy**	California TB 117 - 2013 FMVSS 302 IMO Res. MSC.307 (88) (FTP 2010 Code) Annex 1 Part 8 NFPA 260 - Cover Fabric - Class I UFAC Fabric - Class I
--------------------	--

**This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any material under actual fire conditions.

Finishes



Performance

Anti Static	ASTM D257
Cold Crack -10°F	CFFA-6a
Sulfide Stain Resistant	FISHER BODY™ 31-12
Superior Abrasion	CFFA-1a / ASTM D-4157 100,000 Cycles, Wyzenbeek #10 Cotton Duck
UV Stability	QUV, - ASTM D-4329 / CFFA-2 c2, 650 Hours Weather-Ometer - ISO 105-B04, 1,000 Hours

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Apex™ is a trademark of Spradling Holdings, Inc.
PBG+® is a registered trademark of Spradling Holdings, Inc.
©2026 Spradling International, Inc.

SUSTAINABLE ATTRIBUTES

Heavy Metal Free

PFAS Free

SUSTAINABLE MANUFACTURING CERTIFICATIONS

Carbon Neutral Certified

ISO 14001

ISO 50001

ISO 45001


COMPLIANCES

RoHS Compliant



CLEANING GUIDE

Click here for cleaning instructions

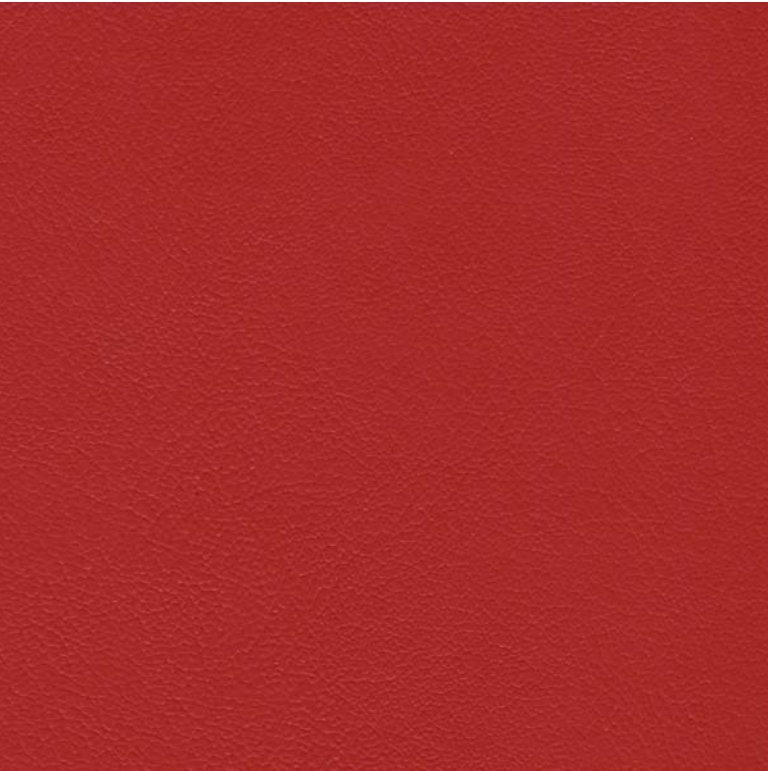

3000B0148
COS-7291
TORCH RED



300460148
COS-7292
EBONY

CHARACTERISTICS

Content	Vinyl
Backing	Hi-Loft™ 100% Polyester

Specifics

Weight:	28 oz.
Width:	54 in.
Roll Size:	30 yd.

Flame Retardancy**	California TB 117 - 2013 FMVSS 302 IMO Res. MSC.307 (88) (FTP 2010 Code) Annex 1 Part 8 NFPA 260 - Cover Fabric - Class I UFAC Fabric - Class I
--------------------	--

**This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any material under actual fire conditions.

Finishes	ACRYLIC
----------	---------

Performance

Abrasion Resistant	CFFA-1a / ASTM D-4157 50,000 Cycles,Wyzenbeek #10 Cotton Duck
Anti Static	ASTM D257
Cold Crack -10°F	CFFA-6a
Sulfide Stain Resistant	FISHER BODY™ 31-12
UV Stability	Xenotest:AATCC™ 16-3 / NTC 1479 CFFA-2a - Blue Wool 1,000 Hours

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Corinthian™ is a trademark of Spradling Holdings, Inc.
©2026 Spradling International, Inc.

SUSTAINABLE ATTRIBUTES

Heavy Metal Free

PFAS Free

SUSTAINABLE MANUFACTURING CERTIFICATIONS

Carbon Neutral Certified

ISO 14001

ISO 50001

ISO 45001

COMPLIANCES


RoHS Compliant

This fabric meets or exceeds these ACT performance guidelines
*Certification Marks owned by ATC


CFFA CHEMICAL FABRICS & FILM ASSOCIATION, INC.

CLEANING GUIDE


Click here for
cleaning instructions

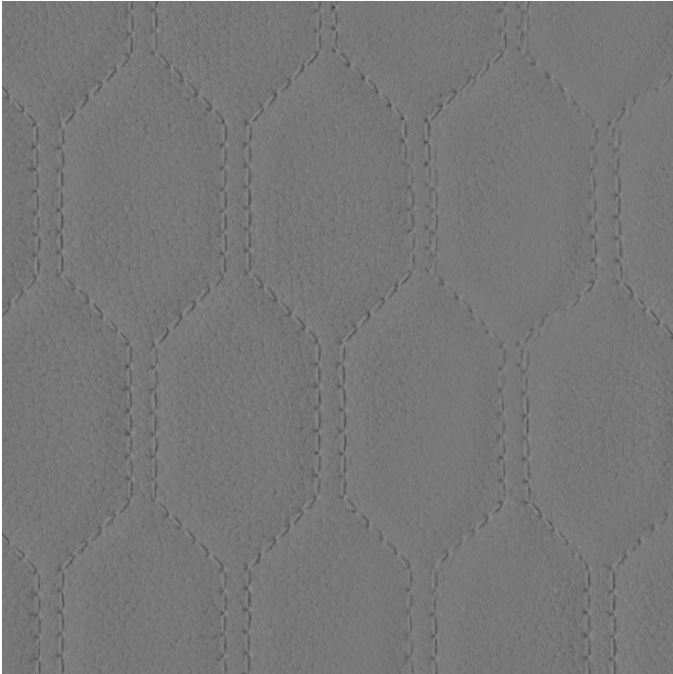


30008B8 IH
FRC-8407
FLINT

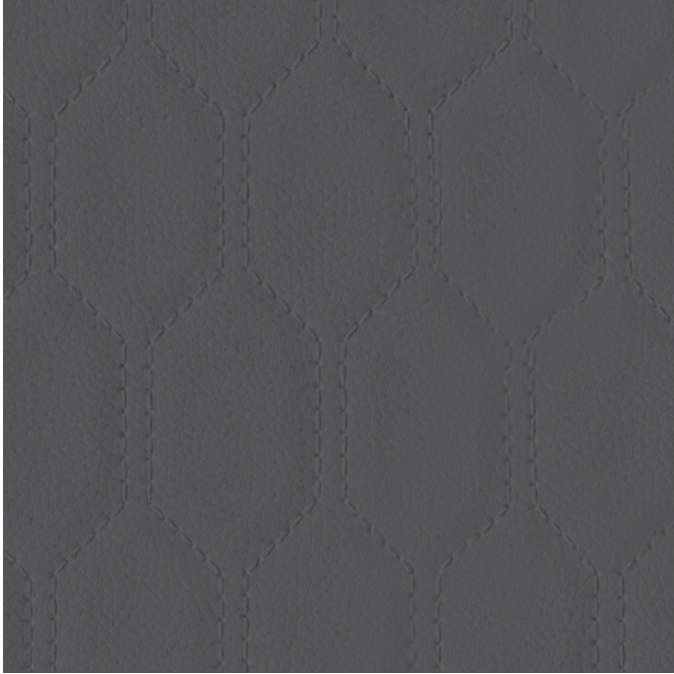

30010B8 IH
FRC-8408
PORCELAIN

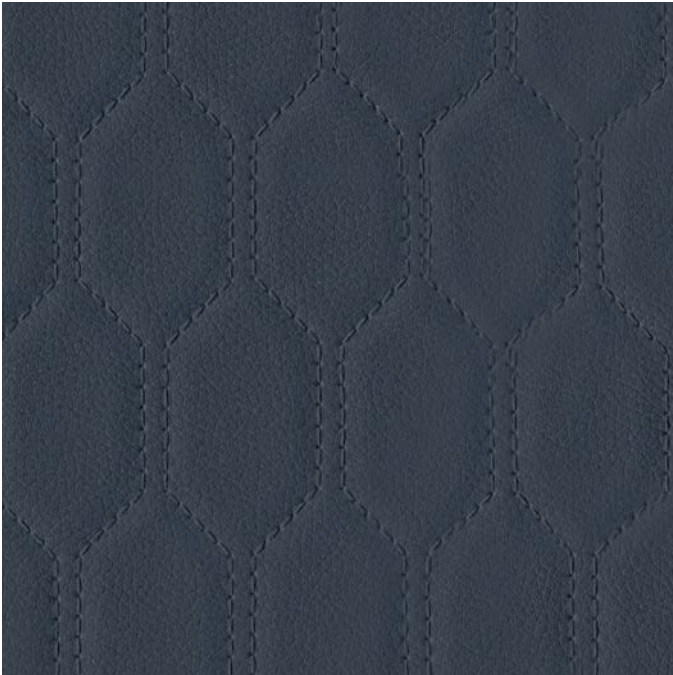

30022B8 IH
FRC-8402
SAPPHIRE

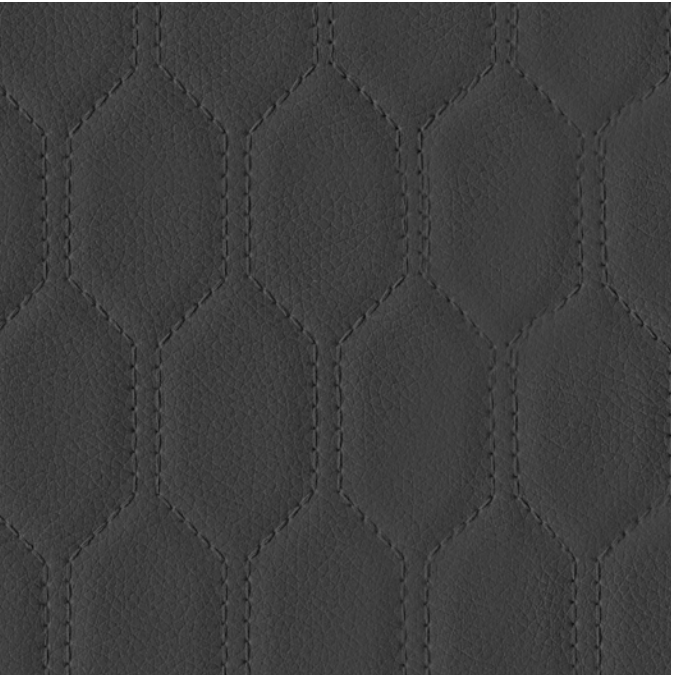

30001B8 IH
FRC-8409
EBONY

CHARACTERISTICS

Content	Vinyl
Backing	Hi-Loft™ 100% Polyester

Specifics

Weight:	26 oz.
Width:	54 in.
Roll Size:	30 yd.

Flame Retardancy**	California TB 117 - 2013 FMVSS 302 IMO Res. MSC.307 (88) (FTP 2010 Code) Annex 1 Part 8 NFPA 260 - Cover Fabric - Class I UFAC Fabric - Class I
--------------------	--

**This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any material under actual fire conditions.

Finishes	PERMABLOK® ADVANCED PROTECTION PLUS+
----------	---

Performance

Anti Static	ASTM D257
Cold Crack -10°F	CFFA-6a
Superior Abrasion	CFFA-1a / ASTM D-4157 75,000 Cycles,Wyzenbeek #10 Cotton Duck
UV Stability	QUV - ASTM D-4329 / CFFA-2 c2, 650 Hours

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Fractal™ is a trademark of Spradling Holdings, Inc.
Permablok® Plus+ is a registered trademark of Spradling Holdings, Inc.
©2026 Spradling International, Inc.

SUSTAINABLE ATTRIBUTES

Heavy Metal Free

PFAS Free

SUSTAINABLE MANUFACTURING CERTIFICATIONS

Carbon Neutral Certified

ISO 14001

ISO 50001

ISO 45001

COMPLIANCES

AB 2998 Compliant

Prop 65 Compliant

REACH Compliant

RoHS Compliant



This fabric meets or exceeds these ACT performance guidelines
*Certification Marks owned by ATC




CFFA
CHEMICAL FABRICS & FILM
ASSOCIATION, INC.

CLEANING GUIDE

Click here for cleaning instructions




3001B0H1C
ILL-2313
CAMEL

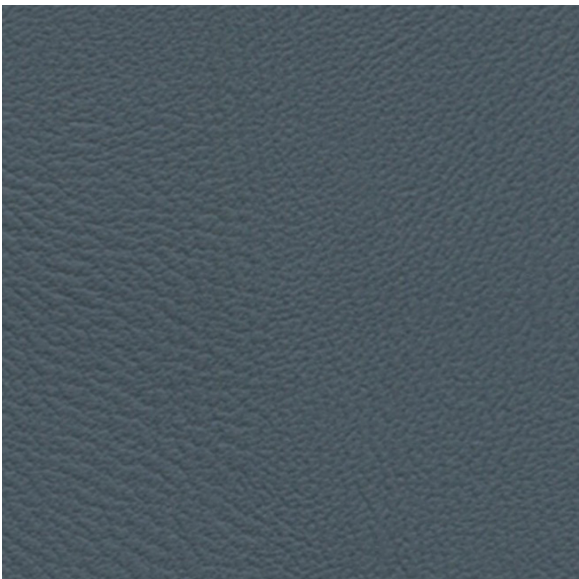


300780H1C
ILL-2300
DENIM



300770H1C
ILL-2302
MARINE

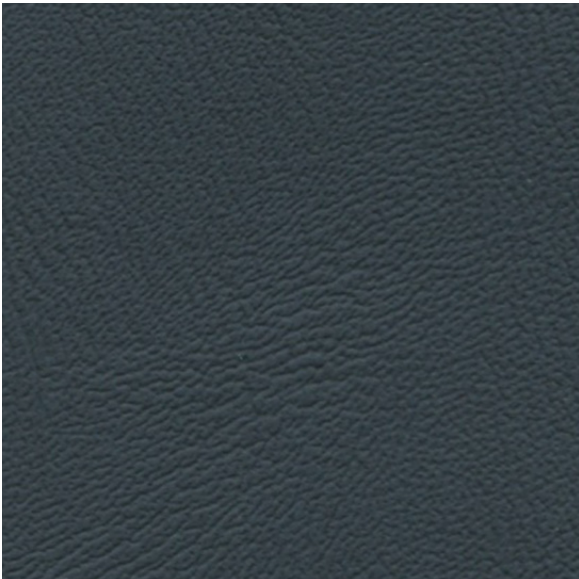

3001D0H1C
ILL-2303
MONTARA

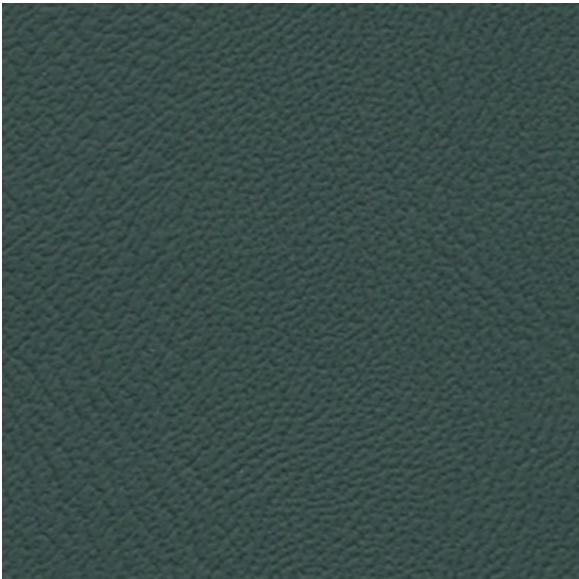

300290H1C
ILL-2304
PINE MOUNTAIN

CHARACTERISTICS

Content	Vinyl
Backing	100% Polyester

Specifics

Weight:	27 oz.
Width:	54 in.
Roll Size:	40 yd.

Flame Retardancy**	California TB 117 - 2013 FMVSS 302 IMO Res. MSC.307 (88) (FTP 2010 Code) Annex 1 Part 8 NFPA 260 - Cover Fabric - Class I UFAC Fabric - Class I
--------------------	--

**This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any material under actual fire conditions.

Finishes	Blockade™
----------	-----------

Performance

Anti Static	ASTM D257
Cold Crack -10°F	CFFA-6a
Superior Abrasion	CFFA-1a / ASTM D-4157 100,000 Cycles,Wyzenbeek #10 Cotton Duck
UV Stability	Xenotest:AATCC TM 16-3 / NTC 1479 CFFA-2a - Blue Wool 1,000 Hours

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Illusion™ is a trademark of Spradling Holdings, Inc.
Blockade™ is a trademark of Spradling Holdings, Inc.
©2026 Spradling International, Inc.

SUSTAINABLE ATTRIBUTES

PFAS Free

COMPLIANCES

RoHS Compliant



This fabric meets or exceeds these ACT performance guidelines
*Certification Marks owned by ATC



CHEMICAL FABRICS & FILM ASSOCIATION, INC.

CLEANING GUIDE

Click here for cleaning instructions



300380D0X
ISL-9179
TITAN NEUTRAL



3001C0D0X
ISL-9157
BRISTOL BLUE



300850D0X
ISL-9154
CHARCOAL



3000M0D0X
ISL-9158
SILVER BLUE



3000L0D0X
ISL-9153
GUNMETAL

CHARACTERISTICS

Content	Vinyl
Backing	Hi-Loft™ 100% Polyester

Specifics

Weight:	29 oz.
Width:	54 in.
Roll Size:	30 yd.

Flame Retardancy**	California TB 117 - 2013 FMVSS 302 IMO Res. MSC.307 (88) (FTP 2010 Code) Annex 1 Part 8 NFPA 260 - Cover Fabric - Class I UFAC Fabric - Class I
--------------------	--

**This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any material under actual fire conditions.

FinishesACRYLIC

Performance

Abrasion Resistant	CFFA- 1a / ASTM D-4157 50,000 Cycles,Wyzenbeek #10 Cotton Duck
Anti Static	ASTM D257
Cold Crack -10°F	CFFA-6a
Sulfide Stain Resistant	FISHER BODY™ 31-12
UV Stability	QUV - ASTM D-4329 / CFFA-2 c2, 650 Hours
	Weather-Ometer - ISO 105-B04, 1,000 Hours

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Islander™ is a trademark of Spradling Holdings, Inc.
©2026 Spradling International, Inc.

SUSTAINABLE ATTRIBUTES

Heavy Metal Free

PFAS Free

SUSTAINABLE MANUFACTURING CERTIFICATIONS

Carbon Neutral Certified

ISO 14001

ISO 50001

ISO 45001

COMPLIANCES

RoHS Compliant



This fabric meets or exceeds these ACT performance guidelines
*Certification Marks owned by ATC



CHEMICAL FABRICS & FILM
ASSOCIATION, INC.

CLEANING GUIDE


Click here for
cleaning instructions



300IG08IF
07869I
KHAKI



300I008IF
078687
PORCELAIN

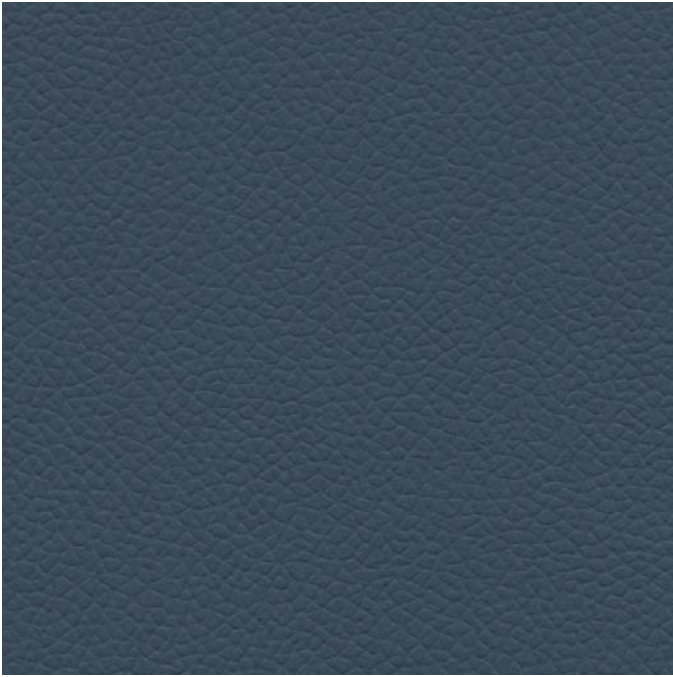

300IF08IF
078500
SAPPHIRE



3000I08IF
078152
EBONY

CHARACTERISTICS

Content	Vinyl
Backing	Hi-Loft™ 100% Polyester

Specifics

Weight:	26 oz.
Width:	54 in.
Roll Size:	30 yd.

Flame Retardancy**	California TB 117 - 2013 FMVSS 302 NFPA 260 - Cover Fabric - Class I UFAC Fabric - Class I
--------------------	---

**This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any material under actual fire conditions.

Finishes	
----------	---

Performance

Anti Static	ASTM D257
Cold Crack -10°F	CFFA-6a
Sulfide Stain Resistant	FISHER BODY™ 31-12
Superior Abrasion	CFFA-1a / ASTM D-4157 100,000 Cycles, Wyzenbeek #10 Cotton Duck
UV Stability	QUV - ASTM D-4329 / CFFA-2 c2, 650 Hours Weather-Ometer - ISO 105-B04, 1,000 Hours

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Leon™ is a trademark of Spradling Holdings, Inc.
Permablok® Plus+ is a registered trademark of Spradling Holdings, Inc.
©2026 Spradling International, Inc.

SUSTAINABLE ATTRIBUTES

Heavy Metal Free

PFAS Free

SUSTAINABLE MANUFACTURING CERTIFICATIONS

Carbon Neutral Certified

ISO 14001

ISO 50001

ISO 45001

COMPLIANCES

RoHS Compliant



This fabric meets or exceeds these ACT performance guidelines
*Certification Marks owned by ATC



CHEMICAL FABRICS & FILM ASSOCIATION, INC.

CLEANING GUIDE

Click here for
cleaning instructions



ASH GREY

CHARACTERISTICS

Content	Vinyl
Backing	100% Polyester

Specifics

Weight:	32 oz.
Width:	54 in.
Roll Size:	30 yd.

Flame Retardancy**	California TB 117 - 2013 FMVSS 302 IMO Res. MSC.307 (88) (FTP 2010 Code) Annex 1 Part 8 NFPA 260 - Cover Fabric - Class I UFAC Fabric - Class I
--------------------	--

**This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any material under actual fire conditions.

Finishes ACRYLIC

Performance

Anti Static	ASTM D257
Cold Crack -10°F	CFFA-6a
Superior Abrasion	CFFA-1a / ASTM D-4157 100,000 Cycles,Wyzenbeek #10 Cotton Duck
UV Stability	Xenotest:AATCC TM 16-3 / NTC 1479 CFFA-2a - Blue Wool 1,000 Hours

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Illusion™ is a trademark of Spradling Holdings, Inc.
Blockade™ is a trademark of Spradling Holdings, Inc.
©2026 Spradling International, Inc.

SUSTAINABLE ATTRIBUTES

PFAS Free

COMPLIANCES

RoHS Compliant



This fabric meets or exceeds these
ACT performance guidelines
*Certification Marks owned by ATC




CHEMICAL FABRICS & FILM
ASSOCIATION, INC.

CLEANING GUIDE

Click here for
cleaning instructions



3004409 IG
RFT-2210
COOL GREY

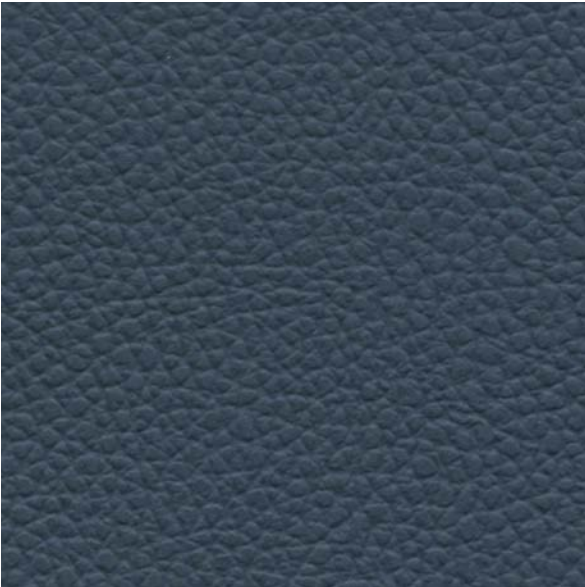

3007709 IG
RFT-2216
DARK SKY




3003309 IG
RFT-2214
RICH NAVY



3001409 IG
RFT-2223
BUTTER CREAM



3001G09 IG
RFT-2226
ALL SPICE

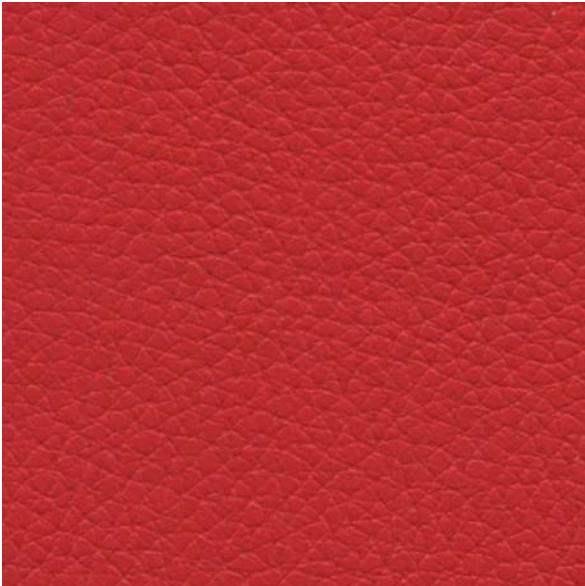

3001109 IG
RFT-2166
HOLLY BERRY

CHARACTERISTICS

Content	Vinyl
Backing	100% Polyester

Specifics

Weight:	32 oz.
Width:	54 in.
Roll Size:	40 yd.

Flame Retardancy**	California TB 117 - 2013 FMVSS 302 IMO Res. MSC.307 (88) (FTP 2010 Code) Annex 1 Part 8 NFPA 260 - Cover Fabric - Class I UFAC Fabric - Class I
--------------------	--

**This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any material under actual fire conditions.

Finishes	Blockade™
----------	-----------

Performance

Anti Static	ASTM D257
Cold Crack -10°F	CFFA-6a
Superior Abrasion	CFFA-1a / ASTM D-4157 100,000 Cycles, Wyzenbeek #10 Cotton Duck
UV Stability	Xenotest: AATCC TM 16-3 / NTC 1479 CFFA-2a - Blue Wool 1,000 Hours

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Illusion™ is a trademark of Spradling Holdings, Inc.
Blockade™ is a trademark of Spradling Holdings, Inc.
©2026 Spradling International, Inc.

SUSTAINABLE ATTRIBUTES

PFAS Free

COMPLIANCES

RoHS Compliant



This fabric meets or exceeds these ACT performance guidelines
*Certification Marks owned by ATC




CFFA
CHEMICAL FABRICS & FILM
ASSOCIATION, INC.

CLEANING GUIDE

Click here for
cleaning instructions



300080H IJ
WYT-0004
DOVE

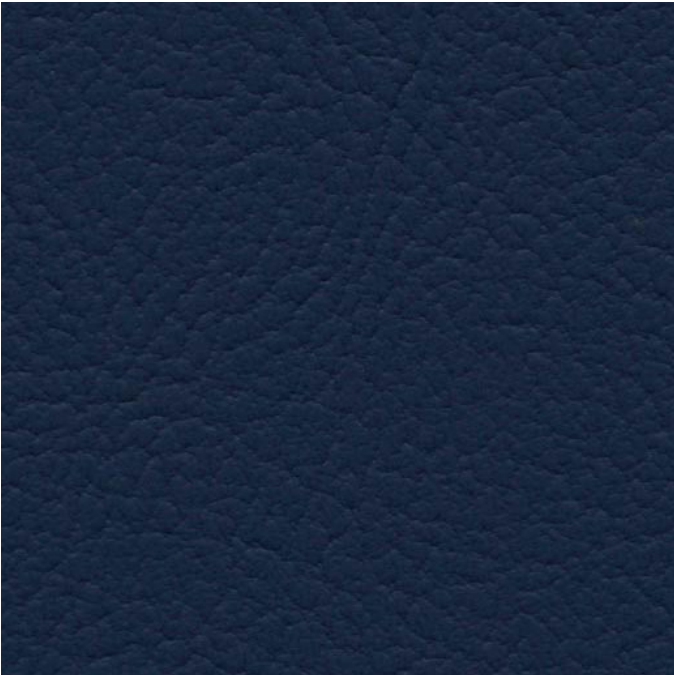

300160H IJ
WYT-0007
ROYAL



300090H IJ
WYT-0006
PORT



300290H I C
WYT-0002
BLACK

CHARACTERISTICS

Content	Vinyl
Backing	100% Polyester

Specifics

Weight:	27 oz.
Width:	54 in.
Roll Size:	30 yd.

Flame Retardancy**	ASTM E662 California TB 117 - 2013 FAR 25.853 (A) Appendix F Part. I (a) (I) (FMVSS 302 NFPA 130 UFAC Fabric - Class I
--------------------	--



**This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any material under actual fire conditions.

Finishes	PERMABLOK® ADVANCED PROTECTION
----------	--

Performance

Anti Static	ASTM D257
Cold Crack -10°F	CFFA-6a
Sulfide Stain Resistant	FISHER BODY TM 31-12
Superior Abrasion	CFFA- 1a / ASTM D-4157 100,000 Cycles,Wyzenbeek #10 Cotton Duck
UV Stability	Xenotest:AATCC TM 16-3 / NTC 1479 CFFA-2a - Blue Wool 1,000 Hours QUV:ASTM D-4329 / CFFA-2 c2 650 Hours

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Waytech™ is a trademark of Spradling Holdings, Inc.
Permablok® is a registered trademark of Spradling Holdings, Inc.
©2026 Spradling International, Inc.

SUSTAINABLE ATTRIBUTES

PFAS Free

SUSTAINABLE MANUFACTURING CERTIFICATIONS

Carbon Neutral Certified

ISO 14001

ISO 50001

ISO 45001

COMPLIANCES

RoHS Compliant

This fabric meets or exceeds these ACT performance guidelines
*Certification Marks owned by ATC

CLEANING GUIDE

Click here for cleaning instructions



300050A IK
DOL-6713
CHOCOLATE



300440A IK
DOL-6726
ARTESIAN




3001F0A IK
DOL-6724
JET



300120A IK
DOL-6709
CAMEL



300290A IK
DOL-6717
MOSS

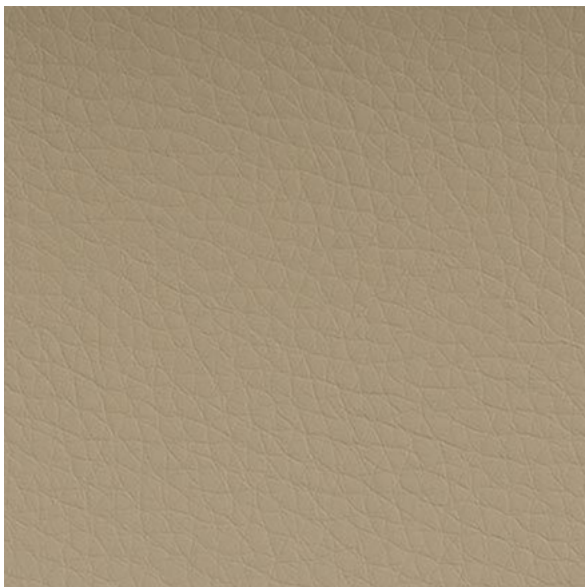

300140A IK
DOL-6703
ECRU

CHARACTERISTICS

Content	Vinyl
Backing	100% Rayon

Specifics

Weight:	27 oz.
Width:	54 in.
Roll Size:	30 yd.

Flame Retardancy**	ASTM E662 California TB 117 - 2013 FAR 25.853 (A) Appendix F Part. I (a) (I) (FMVSS 302 NFPA 130 UFAC Fabric - Class I
--------------------	--



**This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any material under actual fire conditions.

Finishes	PERMABLOK® ADVANCED PROTECTION
----------	--

Performance

Anti Static	ASTM D257
Cold Crack -10°F	CFFA-6a
Sulfide Stain Resistant	FISHER BODY TM 31-12
Superior Abrasion	CFFA- 1a / ASTM D-4157 100,000 Cycles,Wyzenbeek #10 Cotton Duck
UV Stability	Xenotest:AATCC TM 16-3 / NTC 1479 CFFA-2a - Blue Wool 1,000 Hours QUV:ASTM D-4329 / CFFA-2 c2 650 Hours

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Waytech™ is a trademark of Spradling Holdings, Inc.
Permablok® is a registered trademark of Spradling Holdings, Inc.
©2026 Spradling International, Inc.

SUSTAINABLE ATTRIBUTES

PFAS Free

SUSTAINABLE MANUFACTURING CERTIFICATIONS

Carbon Neutral Certified

ISO 14001

ISO 50001

ISO 45001

COMPLIANCES

RoHS Compliant

This fabric meets or exceeds these ACT performance guidelines
*Certification Marks owned by ATC

CFFA

CLEANING GUIDE

Click here for cleaning instructions